




## Server Cabinets

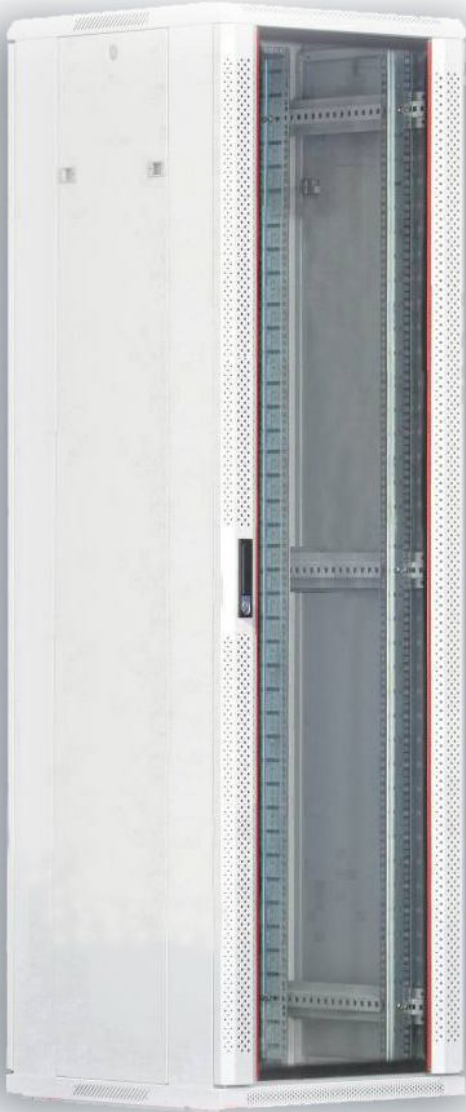

### Feature:

- Exquisite design with precise dimension and craftsmanship
- Adjustable feet and heavy duty castors are available simultaneously
- Cable entry on the top cover and bottom panel with adjustable sizes

- Optional installation of plinth to enable cabinets fixation, under-base cable entry/ventilation
- Efficient and reliable cabinet connection by baying kit
- Removable side panels to ease maintain

**Standard:**

- Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41491 part 1, DIN41494 part 7 standard;

**Construction:**

- Mounting Rail: SPCC cold rolled steel - 14 AWG (2.0mm)
- Mounting Angle: SPCC cold rolled steel - 16 AWG (1.5mm)
- Others: SPCC cold rolled steel - 18 AWG (1.2mm)
- Degreasing, pickling, phosphoric, powder coat
- Colors: Ivory or Black

**Loading capacity:**

- Static loading: 1800 lbs

**Specifications:**

Model	Width (mm)	Capacity (U)
CK-CAB-2266	600*600*1166	22U
CK-CAB-2766	600*600*1388	27U
CK-CAB-2768	600*800*1388	27U
CK-CAB-27610	600*1000*1388	27U
CK-CAB-3768	600*800*1833	37U
CK-CAB-4266	600*600*2055	42U
CK-CAB-4268	600*800*2055	42U
CK-CAB-42610	600*1000*2055	42U
CK-CAB-42810	800*1000*2055	42U
CK-CAB-4768	600*800*2277	47U